

Quick Reference Manual- CellGuard

CellGuard is a software, which guards your mobile phone in case the phone is lost, or it is stolen. You can trace your lost phone easily with CellGuard. It is robust, automated, easy to use, easily operable and configurable, trivial cost software.

Features

- CellGuard is SMS enabled application, which helps you to track your lost or stolen phone.
- Based on GSM Cell ID technology
- Low cost, high security
- Works with S60 2nd edition Symbian OS based phone

MINIMUM REQUIREMENTS:

- Please make sure that your Cell phone is Symbian Series 60 smart phone.
- Tested with Nokia 6600, Nokia 3230, Nokia N70, Nokia 6681.
- Make sure that you download the Cell Guard software in the memory of your phone.

You can use Cell Guard right away by spending some time on going through these easy steps:

Installing CellGuard on your mobile.....	2
Initial Setup.....	3
Set Password	4
Set the Mobile number to which a message to be sent in case of unauthorized SIM card changes.	5
User Detail.....	6
SIM White List.....	8
Change Password.....	9
Reset Password.....	10
Registration.....	11
AutoReply Query.....	12

Installing CellGuard on your mobile

Follow the steps below to install Cell Guard in your mobile to start using CellGuard.

Once you download the software to your computer, your computer will have a file named CellGuard_S60_2nd.SIS

Connect your Mobile to the computer through Bluetooth, Data Cable etc...and transfer this file to your mobile.

Note: Make sure to save CellGuard on your Mobile phone's Memory. As the protection is to be done even if the SIM card of your mobile will be changed.

Initial Setup

After installing CellGuard on device enter default password 123456# on the standby screen to open CellGuard Application for setting different parameters.



Set Password

When you open the CellGuard application first time from your mobile, the system will ask you a password. You need to set and remember this password, as without this password you will not be able to make any settings, even when we need to change the SIM card we need this password and it is important to remember the password.



NOTE : The password must be of 6 digits.



Set the Mobile number to which a message to be sent in case of unauthorized SIM card inserted.


Select the Enter Phone Number Option from the CellGuard Menu options available to set the mobile number as shown in the images below.

A message will be sent to this mobile number with the location and SIM details of the newly inserted SIM card in case someone tries to change the SIM card after the phone is lost or stolen.

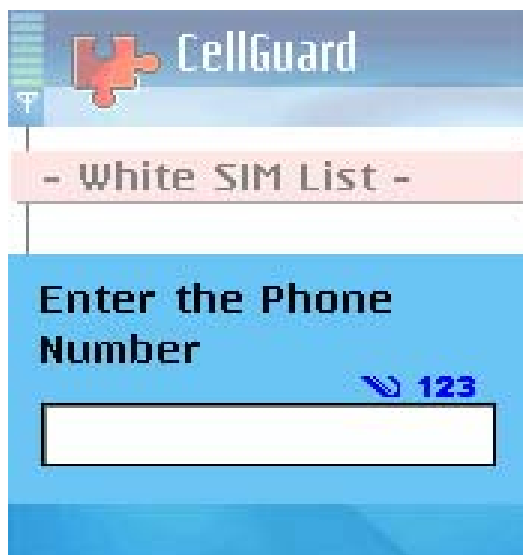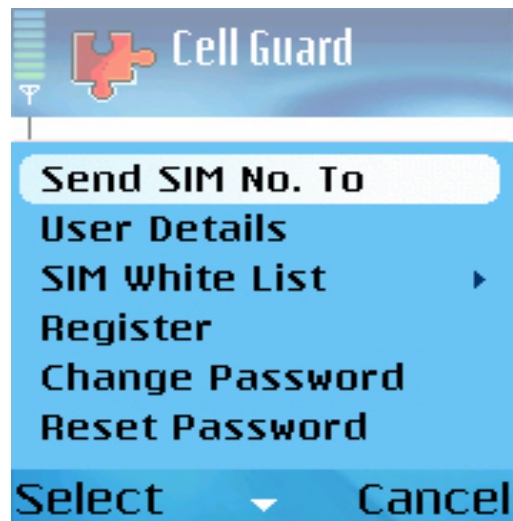

Set User Detail

You can enter your name and birth date in User Detail Section. This will help you in claiming your identity when phone is stolen.

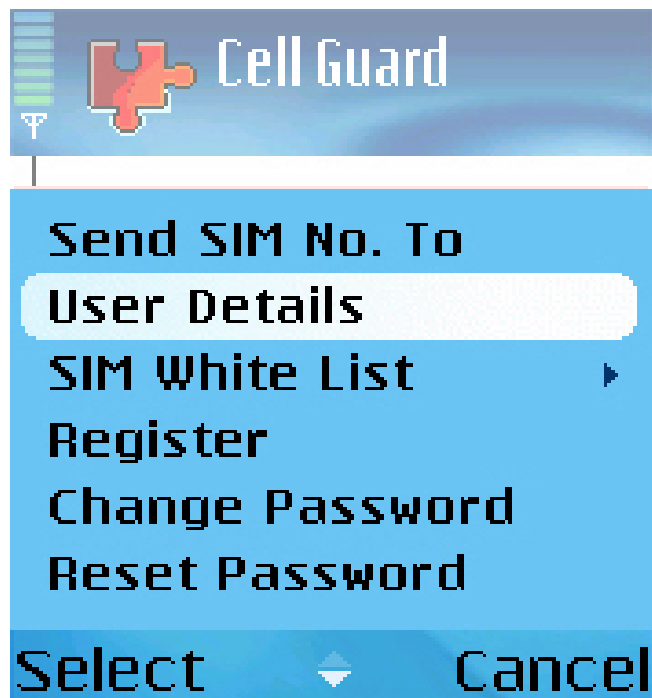

 CellGuard

- White SIM List -

Your Name Abc

Cancel

 CellGuard


- White SIM List -

Birth Date 123

OK Cancel

Set SIM White List

You can add multiple SIM card entries in this section. So this will be an extension to using multiple SIM cards as authorized ones. Same way you can remove unwanted SIM card entries from this list.

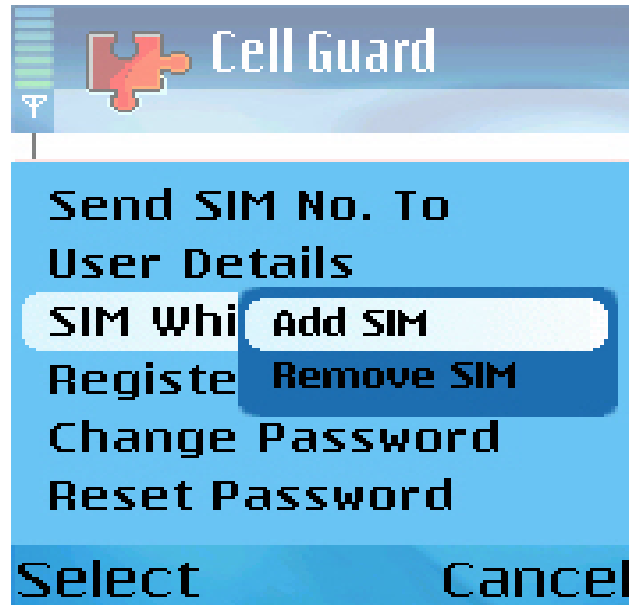

Change Password

In case if you want to change your password at any time, you can use “Change Password” option from the CellGuard menu.

NOTE: The password must be of 6 digits.



Reset Password

You can reset your password on providing Scratch Card No.



The screenshot shows the CellGuard application interface. At the top, there is a header with the CellGuard logo and the text "CellGuard". Below the header, there is a pink bar with the text "- White SIM List -". The main content area has a blue background with the text "Enter Scratch Card Number" in white. To the right of this text is a blue arrow icon and the number "123". Below the text is a white rectangular input field with a black border.

Registration

You can use CellGuard free for 3 days once it is downloaded to your mobile. After that you need to register the application to continue using the CellGuard.

To register follow the steps below:

1. Start the Cell-Guard application in your mobile.
2. Select the registration option
3. Enter your scratch card number.



Auto-Reply Query feature

1) LBS (Location Based System)

CellGuard is integrated with a unique feature called **Location Based System**.

Aspirant can send specific SMS text to CellGuard enabled phone to get current location of CellGuard user.

SMS text format= **LBS CG password(in reverse)**

Example: If you have set your CellGuard Password= 123456 then use following SMS format:

LBS CG 654321

* LBS CG is not case-sensitive. You can use:

Lbs cg

lbs cg

LBs Cg etc.... formats

2) ALARM (To find out Cell Phone within proximity)

You can use CellGuard as mobile finder when you misplace your Cell Phone within proximity. It will emit tone on receiving particular SMS text.

For e.g. You have missed out your Cell Phone in room, unfortunately it is in Silent profile; then you can send specific SMS text to your CellGuard Enabled phone to emit tone so that you can look forward into right direction.

SMS text format= **ALARM CG password(in reverse)**

Example: If you have set your CellGuard Password= 123456 then use following SMS format:

ALARM CG 654321

* ALARM CG is not case-sensitive. You can use:

Alarm cg

alarm cg

AlarM Cg etc.... formats

Important Note: After installing CellGuard on device enter default password 123456# on the stand by screen to open CellGuard Application for setting different parameters.